

D SUB HD MA STR 44P S4_4-40 NUT

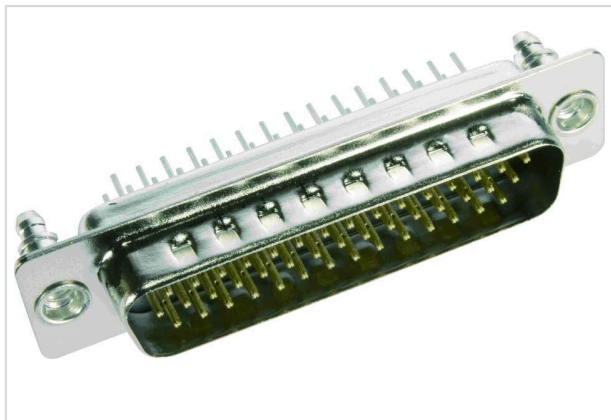


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 56 361 5712 |
| Specification | D SUB HD MA STR 44P S4_4-40 NUT |
| HARTING eCatalogue | https://b2b.harting.com/09563615712 |

Identification

| | |
|----------------------------|---------------------|
| Category | Connectors |
| Series | D-Sub |
| Identification | High Density |
| Element | Connector |
| Description of the contact | Stamped Straight |

Version

| | |
|--------------------|------------------------------------|
| Termination method | Wave soldering termination |
| Gender | Male |
| Size | D-Sub 3 |
| Number of contacts | 44 |
| PCB fixing | With board locks |
| Locking type | Fixing flange with thread 4-40 UNC |

Technical characteristics

| | |
|------------------------------------|-------------------------|
| Distance between rows | 1.98 mm |
| Contact spacing (termination side) | 2.29 mm |
| Rated current | 2 A |
| Clearance distance | ≥1 mm |
| Creepage distance | ≥1 mm |
| Insulation resistance | > 5 x 10 ⁹ Ω |
| Contact resistance | <20 mΩ |



Pushing Performance
 Since 1945

Technical characteristics

| | |
|---------------------------|-------------------------------|
| Tightening torque | ≤0.6 Nm Female screw lock |
| Limiting temperature | -40 ... +85 °C |
| Performance level | NM 30 (S4) 1 |
| Mating cycles | ≥500 |
| Test voltage $U_{r.m.s.}$ | 1 kV |
| Isolation group | IIIa ($175 \leq CTI < 400$) |
| PCB thickness | 1.6 mm |
| Installation height | 6.1 mm |
| Hot plugging | No |

Material properties

| | |
|---|---|
| Material (insert) | Thermoplastic resin, glass-fibre filled (PBTP) Shell: steel, nickel plated |
| Colour (insert) | Black |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Noble metal over Ni Mating side Sn over Ni Termination side |
| Layer thickness | ≥0.76 µm |
| Layer thickness | ≥30 µinch |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant with exemption |
| RoHS exemptions | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status | compliant with exemption |
| China RoHS | 50 |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Lead |
| ECHA SCIP number | ecef7555-f643-4ceb-a337-fc54762297f1 |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Antimony trioxide Lead Nickel |



Pushing Performance
Since 1945

Material properties

| | |
|------------------------------------|-----|
| Requirement set with Hazard Levels | R26 |
|------------------------------------|-----|

Specifications and approvals

| | |
|----------------|-----------------------|
| Specifications | DIN 41652 |
| UL / CSA | UL 1977 ECBT2.E102079 |

Commercial data

| | |
|--------------------------------|------------------------|
| Packaging size | 100 |
| Net weight | 9.012 g |
| Country of origin | China |
| European customs tariff number | 85366990 |
| GTIN | 5713140071858 |
| eCl@ss | 27440214 D-Sub coupler |