

ix Type A 4x2xAWG26/7 PUR 1.0m

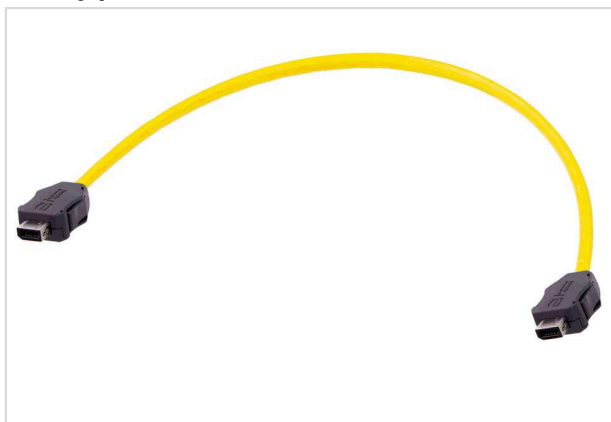


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 33 48 010 1804 010 |
| Specification | ix Type A 4x2xAWG26/7 PUR 1.0m |
| HARTING eCatalogue | https://b2b.harting.com/33480101804010 |

Version

| | |
|--------------------|-----------------|
| Cable length | 1 m |
| Number of cores | 8 |
| Core structure | 4x 2x AWG 26/7 |
| Termination method | IDC termination |
| Coding | Type A |

Technical characteristics

| | |
|------------------------------|--|
| Transmission characteristics | Cat. 6 _A Class E _A up to 500 MHz |
| Data rate | 10 Mbit/s |
| | 100 Mbit/s |
| | 1 Gbit/s |
| | 2.5 Gbit/s |
| | 5 Gbit/s |
| Limiting temperature | -40 ... +80 °C unmoved |
| | -40 ... +80 °C moved |

Material properties

| | |
|-----------------------------|--------------------|
| Material (cable) | PUR (polyurethane) |
| Colour (cable) | Yellow |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |



Pushing Performance
Since 1945

Material properties

REACH SVHC substances Not contained

Specifications and approvals

| | |
|----------------|--|
| Specifications | IEC 60332-1-2 Flame retardancy |
| | IEC 60754-1 Halogen freeness |
| | EN 60811-404 Oil resistance |
| | UN/ECE-R 118 fire protection for rolling stock |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Net weight | 65 g |
| Country of origin | Latvia |
| European customs tariff number | 85444290 |
| GTIN | 5713140259546 |
| eCl@ss | 27060390 Ready-made data cable (unspecified) |
